

DINO-LURIA®

Vanne à Passage Direct


Réf :
153 112

ACIER

- » COIN FLEXIBLE
- » TIGE EXTÉRIURE
- » DIN 3205 F7

- » BRIDES
- » ISO PN40

- » TMS : 450°C (1)
- » PMS : 40B

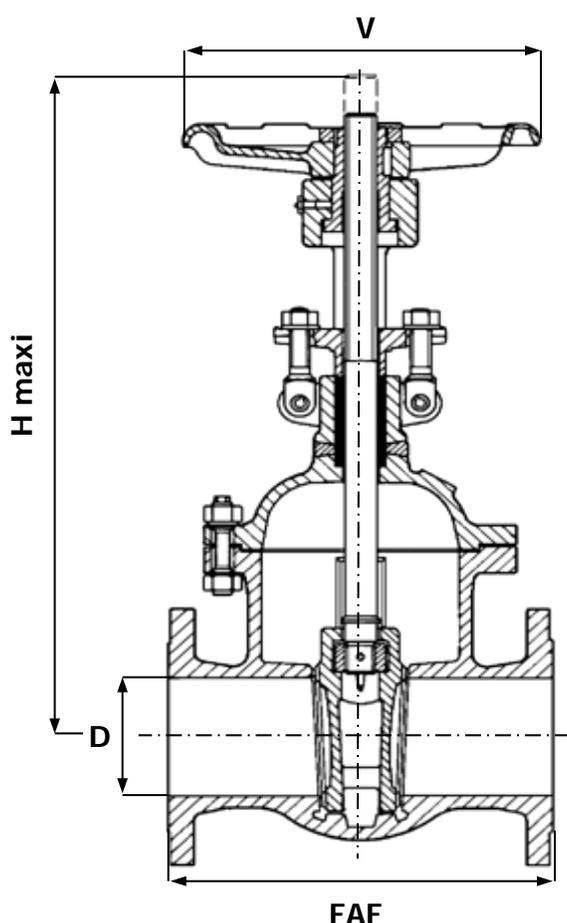

CORPS / BODY	ACIER GSC 25
CHAPEAU / BONNET	ACIER GSC 25
OPERCULE / WEDGE	ACIER GSC 25 + INOX F6
SIÈGES / SEATS	INOX F6
TIGE / STEM	INOX F6
JOINT DE CORPS / GASKET	GRAPHITE
PRESSE ÉTOUPE / PACKING GLAND	FIBRE GRAPHITE

DN	8	10	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	500	600
INCHES	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	20"	24"
FAF							240	250	290	310	350	400	450	550	650	750	850	950	1150	1350
H maxi							370	400	520	570	630	730	880	1040	1235	1390	1610	1830	2250	2510
D							40	50	65	80	100	125	150	200	250	300	350	400	500	600
V							230	230	250	250	305	320	355	457	457	559	630	710	900	1000
MASSE							18	25	39	47	59	80	138	198	312	392	710	1223	1750	2400

Unités : mm, Kg.